




ALTIMEX 1U 5 POSOSION CHASSIS

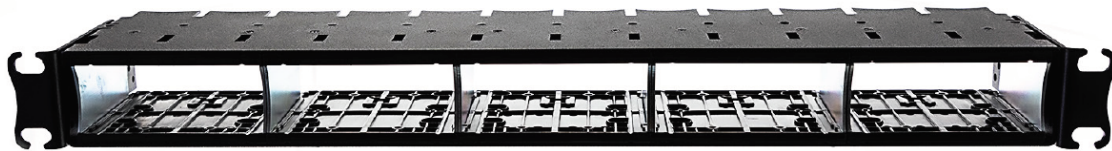

Front View




Top View

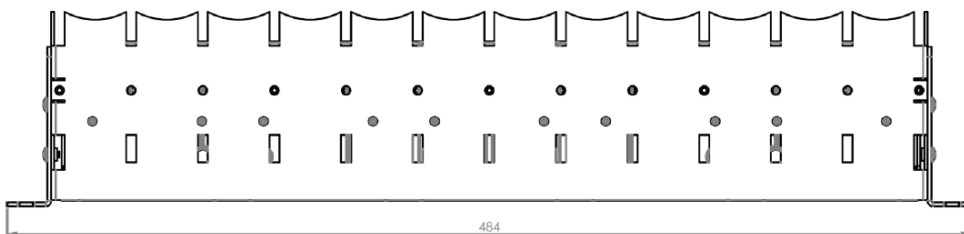

Dimensions (mm)

Side View



ALTIMEX 1U chassis, mountable in 19-inch racks (other options available) provides user-friendly and flexible connectivity when combined with ALTIMEX cassettes, harnesses, trunks and patch cords.

The simple design allows 5 cassettes to be loaded from either the front or rear with easy, fast and secure latching.

It provides a flexible high density system for managing fibre terminations, cabling and patching in data centre and LAN applications, optimising rack utilisation and minimising floor space.

Product specification subject to change without prior notice.

Product Specifications.

No. of Rack Spaces	1U	Mount Options	Front Mounting Ears (recessable) 0U, Top and Side of Rack Options
Cassette Capacity	5 Cassettes	Housing Material Wall Material Divider Material	Cold Rolled Steel - Powder Coated, Stipple Finish, Black RAL (9005) PA66 Black RAL (9005) CR4 Steel - Clear Zinc Passivated
Fibre Count	120 LC Fibres 60 SC Fibres	Free of Hazardous Substances	RoHS/REACH SVHC
Enclosure Type	Standard 19" Rack Mountable	Product Dimensions	484x98x44mm (WxDxH)
Compliant with	TIA/EIA-568-3.D ISO/IEC 11801 EN 50173-1	Packaging Dimensions	510x110x50mm (WxDxH)
Application	Compatible with Altimex Cassettes	Shipping Information	1/1 - 1.65kg

Product specification subject to change without prior notice.