


# ALTIMEX 24F OS2 Trunk Cables



ALTIMEX Ultra low insertion loss MTP/MPO trunk cable for a 40G/100G direct connection.

The OS2 singlemode trunk cable is recommended for high-density data centre applications.

Our MTP/MPO trunk cables are fully tested for low insertion loss and back reflection on every connector and attenuation loss that meets or exceeds current industry standards.

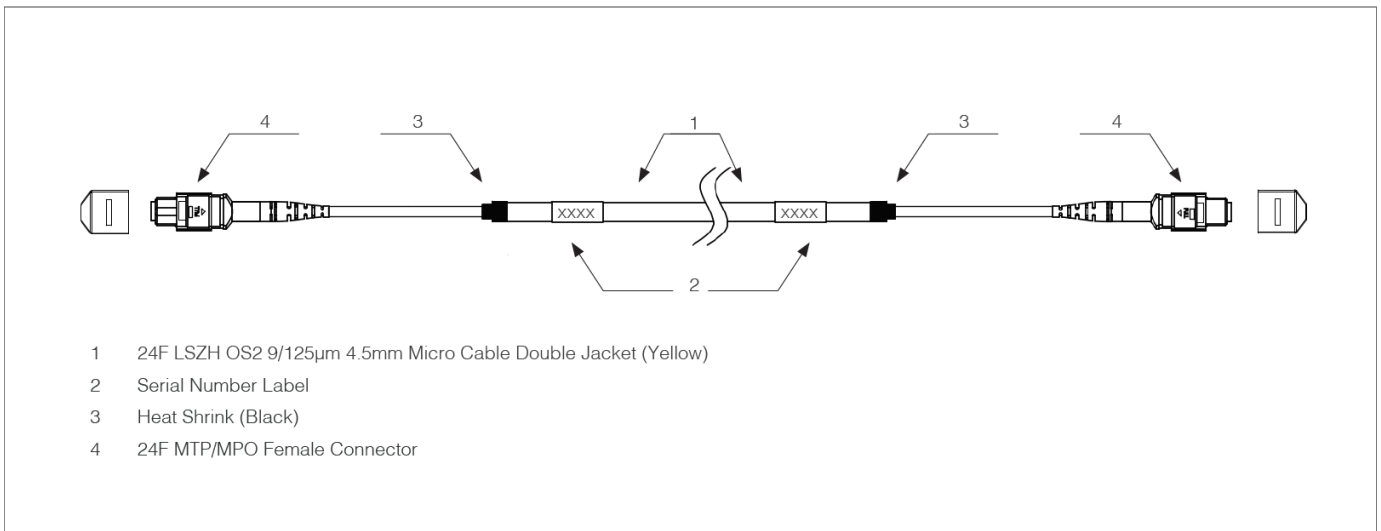

## Multimode Product Specifications.

Connector A	MTP/MPO Female (pinless)	Connector B	MTP/MPO Female (pinless)
Fibre Mode	OS2 9/125µm SM	Wavelength	1310/1550nm
Polish Type	UPC to UPC	Minimum Bend Radius	10mm
Insertion Loss	0.35dB Max (0.15dB Typ.)	Return Loss	≥60dB
Attenuation at 850nm	≤0.32 dB/km	Attenuation at 1550nm	≤0.18 dB/km
Jacket OD	4.5mm	Cable Jacket	LSZH
Installation Tensile Load	100 N	Long-Term Tensile Load	150 N
Operating Temperature	-20°C to +70°C	Storage Temperature	-40°C to +85°C

Product specification subject to change without prior notice.