


# ALTIMEX OS2 BREAKOUT CABLES

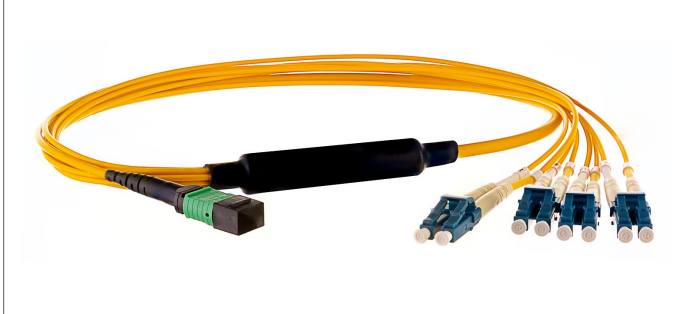


ALTIMEX MTP/MPO Breakout cable, a cost-effective alternative to time-consuming field termination, is designed for high-density fibre patching in data centres which need space saving and reduce cable management troubles.

It is optimized for 40G QSFP+ SR4 to 10G SFP+ SR, 100G QSFP SR4 to 25G SFP-25G-SR-S optics direct connection and high-density data centre applications.

## Multimode Product Specifications.

Connector A	MTP/MPO Female(pinless)	Connector B	LC UPC Duplex
Fibre Mode	OS2 9/125 $\mu\text{m}$ SM	Wavelength	1310/1550 nm
MPO Connector IL	0.35 dB Max. (0.15dB Typ.)	LC Connector IL	$\leq 0.2$ dB
MPO Connector RL	$\geq 60$ dB	LC Connector RL	$\geq 50$ dB
Attenuation at 1310 nm	$\leq 0.32$ dB/km	Attenuation at 1550 nm	$\leq 0.18$ dB/km
Jacket OD	4.5 mm	Fan-Out Diameter	2.0 mm
Installation Tensile Load	100 N	Long-Term Tensile Load	150 N
Cable Jacket	LSZH	Fibre Count	8 Fibres
Operating Temperature	-20°C to 70°C	Storage Temperature	-40°C to 85°C

Product specification subject to change without prior notice.

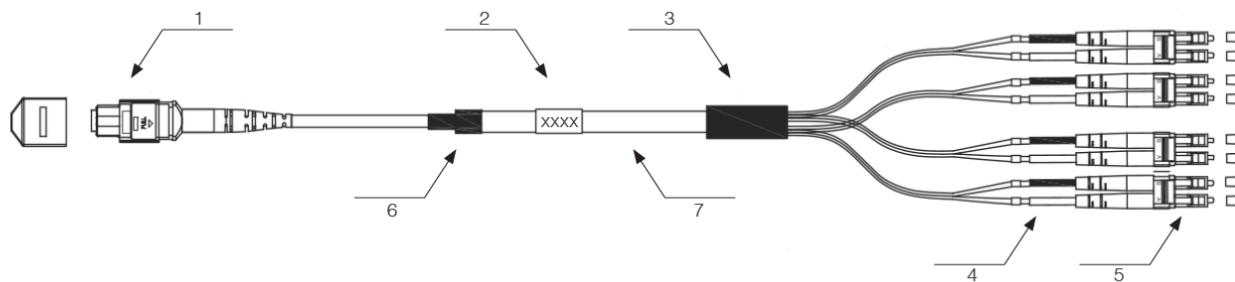

- 1 12F (8 fibres used) MTP/MPO Female Connector
- 2 Serial Number Label
- 3 Breakout Module & Heat Shrink (Black)
- 4 Designation Labels
- 5 LC Dx Connector
- 6 Heat Shrink (Black)
- 7 12F (8 fibres used) LSZH OM4/OM3 50/125 4.5mm Micro Cable Double Jacket (Yellow)

Product specification subject to change without prior notice.