


ALT LC MTP / MPO SINGLEMODE CASSETTES

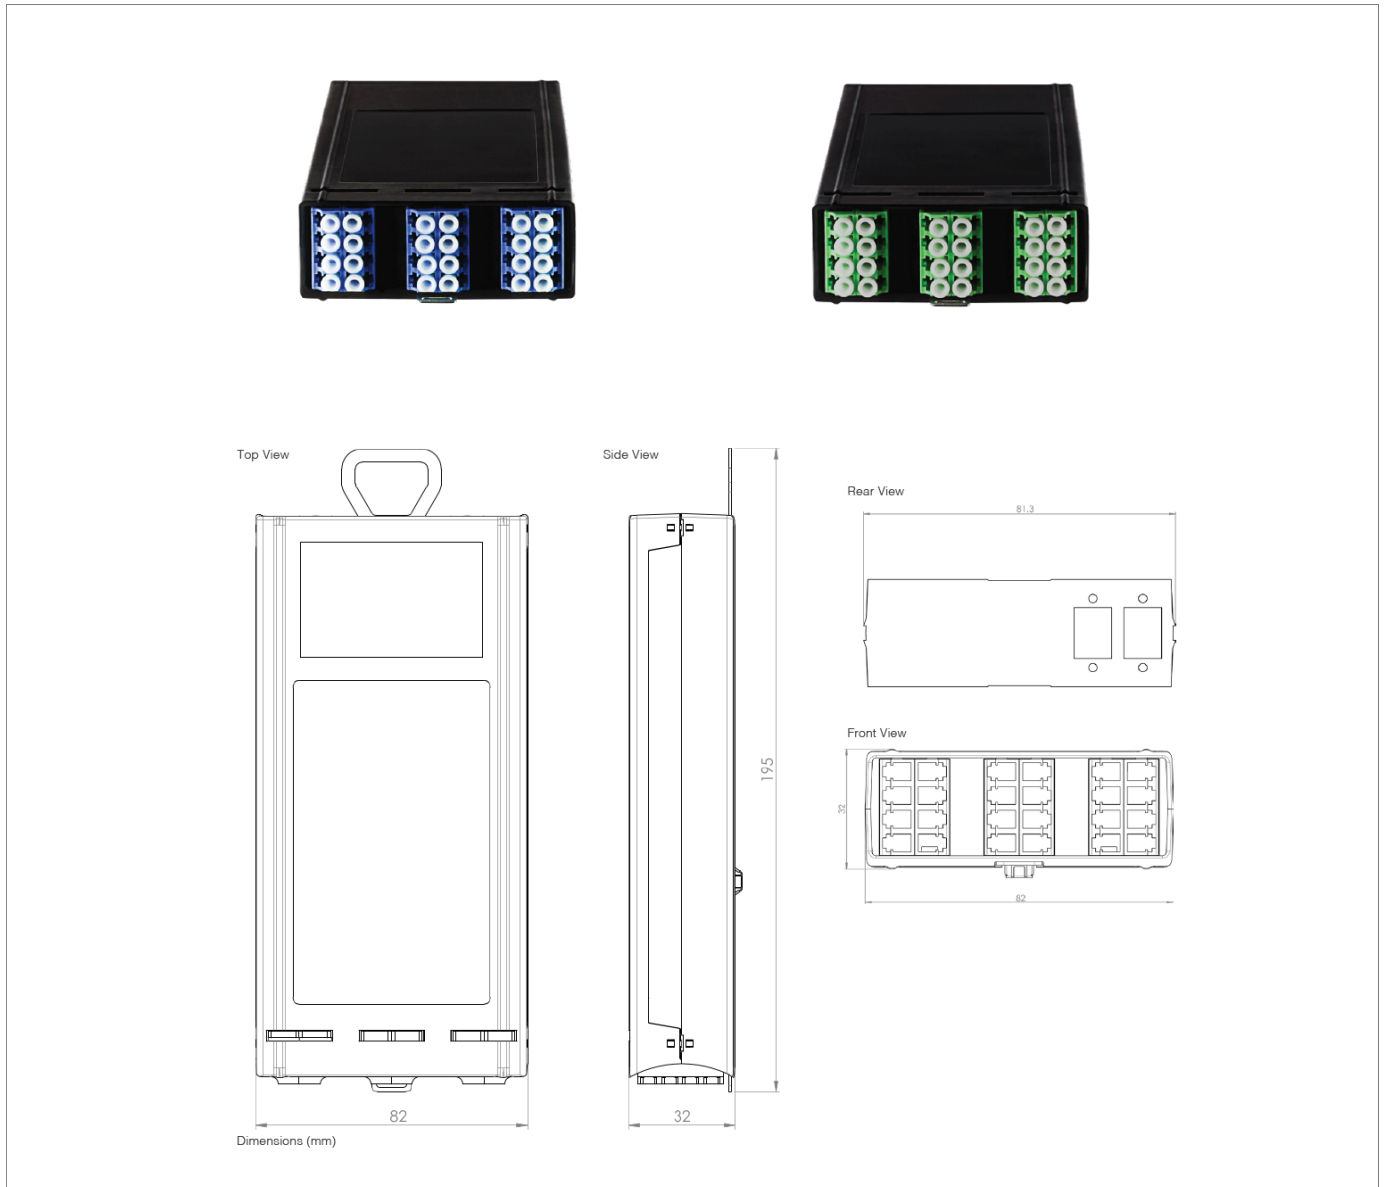

ALT LC singlemode MTP/MPO cassettes are designed for all data centre and enterprise network applications, easy to handle and fast to install.

With tool-less installation and one click latching technology, ALT LC singlemode MTP/MPO cassettes can be inserted and removed from both the front and the rear.

They can be housed in either 1U or 2U chassis, or 0U housings.

They are designed for quick and efficient network installation using ALT MTP / MPO trunk cables and patch cords.

Product specification subject to change without prior notice.

Product Specifications.

| | | | |
|------------------------------|--|----------------------|---|
| Fibre Count | Up to 24 Fibres | Fibre Mode | OS2, G657A1 /2 /3 |
| Front Connector Type | 6 x LC Quad UPC/APC | Rear Connector Type | 2x12, 1x24, 3x8, MTP/MPO APC Male (pinned) |
| MTP / MPO Adaptor | Key up to Key down | Application | Compatible with ALT Chassis |
| Insertion Loss | MTP/MPO $\leq 0.35\text{dB}^*$ LC $\leq 0.2\text{dB}$ | Return Loss | MTP/MPO $\geq 60\text{dB}^*$ LC $\geq 50\text{dB}$ |
| Polarity | A/C | | |
| Compliant with | TIA/EIA-568-3.D ISO/IEC 11801 EN 50173-1 | Cassette Material | ABS, Smooth Finish, Black RAL (9005) |
| Product Dimension | 82 x 195 x 32 (WxDxH) | Packaging Dimensions | 90 x 221 x 40mm (WxDxH) |
| Free of Hazardous Substances | RoHS/REACH SVHC | Shipping Information | 1/1 - 0.30kg |

* Using MTP® Elite Connectors & Low Loss LC Connectors

Product specification subject to change without prior notice.